

SLOPEWATCH · DESIGN PRECIS

SlopeWatch design precis

Design Molecule Lab · designmolecule.com

DOCUMENT CONTROL

Document ID	SLW-PRC-001	Version	0.4
Status	Draft	Date	2026-09-25
Author	Amish Chadha	License	CERN-OHL-S-2.0
Project TRL	TRL 3 Proof of concept		
Repository	github.com/BoujeeEnjinia1701/slopewatch		
Source	docs/02-concept.md @ 50ddcd2		

REVISION HISTORY


Version	Date	Author	Change
0.4	2026-09-25	Amish Chadha	Recommendations accepted by Amish (DDR-002)
0.3	2026-09-25	Amish Chadha	TRL 3 update from SLW-DDR-001 and SLW-CAL-001 (choices adopted for TRL 3 work, capsule 0.4 m deep, crack-gauge reader, beacon duty, checked numbers, cost, drawing SLW-DWG-001)
0.2	2026-09-25	Amish Chadha	Populate to TRL 2 (architecture, alert logic, first-order numbers, safety, media)
0.1	2026-09-25	Amish Chadha	Initial scaffold

SlopeWatch design precis

SlopeWatch watches a slope for accelerating movement with three grouted tilt stakes and a crack gauge, cabled to one FieldNode core on an existing pole (or an optional mast) at the toe, and sounds a siren and beacon on site when the tilt rate passes a warning threshold, while sending an SMS through LoRaWAN. The TRL 3 calculations (SLW-CAL-001) show that the inclinometer resolves the tilt-rate thresholds with a wide margin, that a capsule 0.4 m deep keeps temperature drift within R2 even in wet soil, that the siren starts about 13 s after a confirmed warning, and that the FieldNode cell covers five sunless days with an alarm. Amish accepted the recommended choices on 2026-09-25 (SLW-DDR-002): the reference site uses an existing pole, with the mast as a site option, and the keyed silence switch stands on its own post about 5 m from the siren. The SlopeWatch-specific parts then cost \$245 against the \$250 budget, or \$269 where a new mast is needed; the FieldNode core (\$126) is costed in its own project. The main risks are siren reach near machinery, the unrated FieldNode 12 V rail current and the remote alert time at the slowest radio setting.

SlopeWatch

CONCEPT, NOT FOR FABRICATION

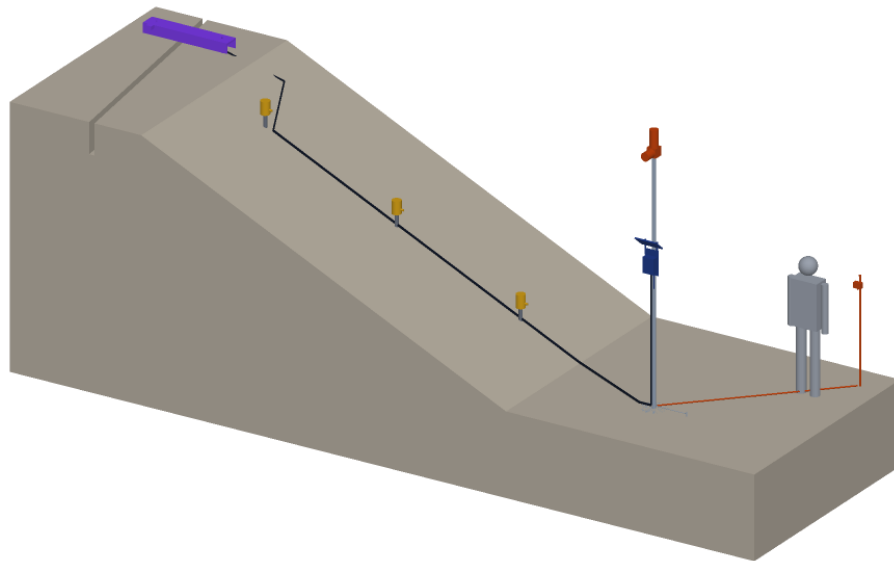

Grey: 1.75 m person for scale

Figure 1. SlopeWatch on a 25 degree slope (spacing compressed for the picture; the reference site has stakes 10 m apart); three tilt stakes on the fall line, a crack gauge (purple) across a tension crack at the crest, the mast (a site option; an existing pole in the reference site) with FieldNode core, siren and beacon at the toe, and the keyed switch on its own post. Grey figure: 1.75 m person for scale.

■ How it works

1. **Sense tilt.** Each tilt stake is a 48 mm steel pipe grouted 0.8 m into the slope's surface layer. A sealed capsule with a MEMS inclinometer sits inside the pipe 0.4 m below ground, between two foam plugs. When the surface layer creeps downslope, the stake rotates with it; the approach and its thresholds follow Uchimura et al. (2015).
2. **Sense cracks.** A crack gauge spans a tension crack near the crest, where movement often shows first: two anchor pins either side of the crack and a 100 mm linear displacement sensor between them, under a guard, with a small reader board that puts the gauge on the same bus as the capsules.
3. **Collect.** A four-core cable in conduit links all sensors on an RS-485 bus to one of the FieldNode core's M12 ports, powered from its 5 V rail. Every 10 min the node switches the bus on for about 12 s, reads a 10 s average from each capsule and the gauge, and switches it off.
4. **Decide.** The node computes the tilt and opening rate for each sensor and runs the alert rules below. Raw readings are kept on the node's flash for at least 90 days.
5. **Alarm.** In the warning state the node drives the siren and beacon through the second M12 port from its 12 V rail, with no network needed, and raises its uplink rate from hourly to every 10 min.
6. **Notify and review.** Readings reach any LoRaWAN server (the lab's TwinKit gateway or The Things Network). An open alert service sends SMS or app messages to named people and plots inverse velocity against time (Fukuzono, 1985) for the engineer.

SlopeWatch: data and alert flow (latencies are estimates)

CONCEPT, NOT FOR FABRICATION

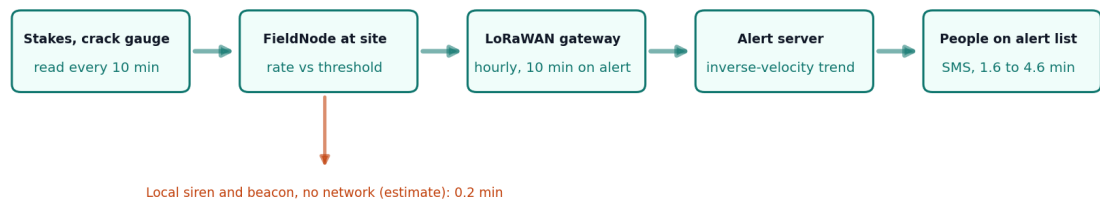


Figure 2. Data and alert flow for one site. The local siren path does not depend on the network. All latencies are estimates.

Alert rules

The tilt rules below were decided by Amish on 2026-09-25 (SLW-DDR-001 D6, SLW-DDR-002). The crack-opening thresholds are placeholders to be set per site and remain open (SLW-DDR-001 O3).

Table 1. Alert states.

State	Entered when	Action
Normal	No condition below	Read every 10 min; uplink hourly
Precaution	Any stake tilts faster than 0.01 degrees per hour averaged over 3 h, or the crack opens faster than 1 mm per day over 24 h (placeholder)	Uplink every 10 min; message to the site manager and engineer; beacon flashes slowly at 1 % duty or less (for example 100 ms every 10 s)
Warning	Any stake tilts faster than 0.1 degrees per hour over 1 h, confirmed on two consecutive readings, or the crack opens faster than 1 mm per hour (placeholder)	Siren and fast beacon on site; SMS to everyone on the list; inverse-velocity plot flagged
Silenced	Keyed switch on its post about 5 m from the mast	Siren off for 30 min, beacon stays on; the node re-arms automatically

■ Main components

Numbers match the exploded view (Figure 3) and `bom/bom.csv`.


Table 2. Main components.

#	Component	Choice (decided by Amish, 2026-09-25)	Notes
1	Tilt stake (3 per site)	48.3 x 3.2 mm galvanized steel pipe, 1.0 m long, 0.8 m in ground, lower 450 mm in a 110 mm grout column	Couples the stake to the surface layer; steel passes R2 (SLW-CAL-001, section B)
2	Tilt sensor capsule (3)	Murata SCL3300 inclinometer in mode 1, small microcontroller, RS-485 transceiver and 3.3 V regulator, potted in a 34 x 130 mm tube	Sits 0.4 m below ground between foam plugs to damp temperature swings
3	Stake head (3)	120 mm PVC cap with cable gland facing downslope	Keeps rain out of the pipe; marks the stake
4	Crack displacement gauge	100 mm linear potentiometer displacement sensor between two anchor pins, with guard and an RS-485 reader	Re-settable when the crack opens past range
5	Sensor bus cable	Four-core shielded outdoor cable (power and RS-485) in corrugated conduit, about 60 m	Surface-laid in the prototype; buried where the ground allows
6	FieldNode core	Lab shared node: IP65 box, 6 W panel, LiFePO4 3.2 V 6 Ah, MPPT charger, STM32WL-class LoRaWAN radio, two M12 ports	Costed in the FieldNode project (SLW-DDR-001 D1)
7	Siren and beacon alert unit	12 V piezo siren, about 110 dB(A) at 1 m, and an amber LED beacon, switched by the node	Keyed silence switch on its own post about 5 m from the mast, on a 7 m lead (SLW-DDR-002)
8	Mast and footing (site option)	48.3 x 3.2 mm galvanized pipe, 3.2 m above ground, in a 320 mm x 0.6 m concrete footing, with an earth rod	Only where no existing pole or building can carry the node (SLW-DDR-002)
9	Gateway and alert software	Any LoRaWAN server; open alert service with SMS and inverse-velocity plot	Not shown in the media; gateway (TwinKit, about \$290) not in site cost

SlopeWatch: exploded view of one of each kit item

CONCEPT, NOT FOR FABRICATION

- 1 Tilt stake, pipe, grout and plugs (1 of 3)
- 2 Tilt sensor capsule (1 of 3)
- 3 Stake head with cable gland (1 of 3)
- 4 Crack displacement gauge with reader
- 5 Sensor bus cable in conduit (coil)
- 6 FieldNode core with 6 W panel
- 7 Siren and beacon
- 7 Keyed switch on its own post
- 8 Mast, footing and earth rod (site option)

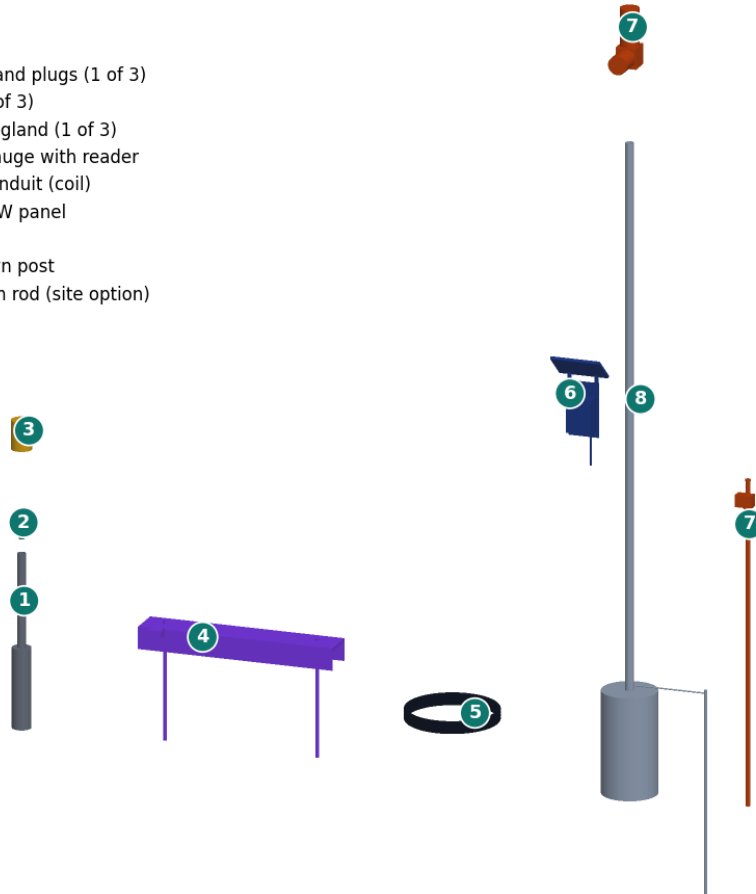


Numbers match bom/bom.csv. A site uses three stakes (items 1 to 3); item 9 (gateway and software) is not shown.

Figure 3. Exploded view of one of each kit item, with numbered callouts matching the BOM. A site uses three stakes (items 1 to 3).

SlopeWatch: cutaway of one tilt stake

CONCEPT, NOT FOR FABRICATION

- 1 Tilt stake: 48.3 mm pipe in 110 mm grout column
- 2 Tilt sensor capsule, 0.4 m below ground
- 3 Stake head with cable gland
- 5 Bus lead from capsule to gland

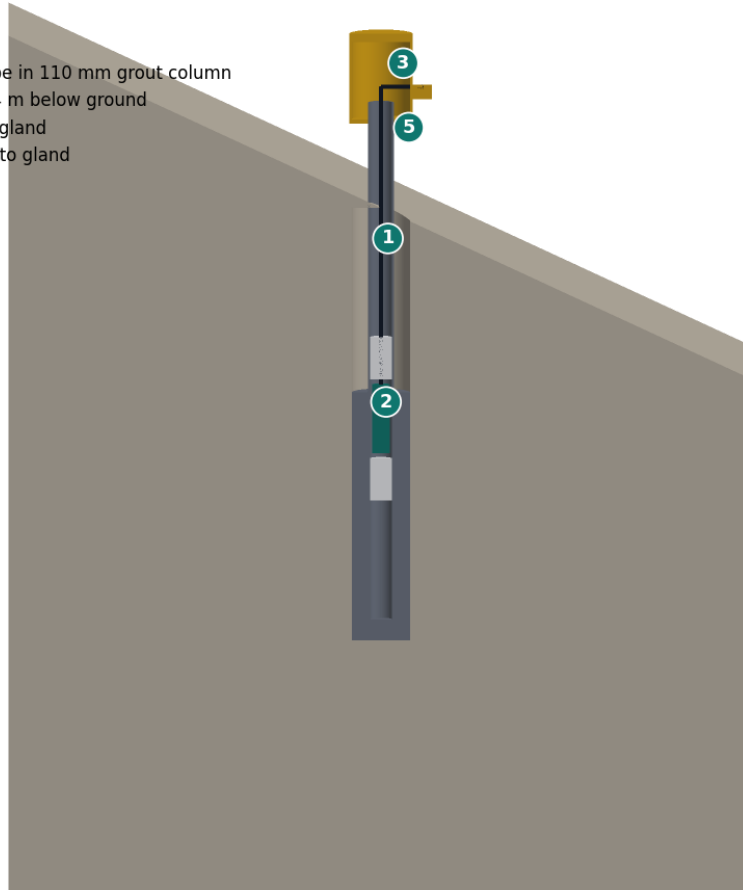

Section on the stake axis. At 0.4 m the daily soil temperature swing is damped enough to meet R2 (SLW-CAL-001).

Figure 4. Section through one tilt stake on its axis, showing the grout column, the capsule 0.4 m below ground between foam plugs, and the lead to the cable gland.

The general arrangement drawing [SLW-DWG-001](#) (Rev P2) gives the main dimensions of the stake, crack gauge, mast and switch post, generated from the parametric model `cad/src/model.py`.

■ Key numbers (SLW-CAL-001)

All values are calculations for a paper proof of concept, from `docs/04-calcs/sizing.py`. They replace the TRL 2 estimates.

Table 3. Key numbers and requirement status.

Quantity	Value	Requirement
Inclinometer output step; noise over a 10 s average	0.0055 degrees; 0.00054 degrees (mode 1, ± 90 degrees)	R1 met on paper
Tilt-rate noise over 1 h	0.00061 degrees per hour, 164 times below the warning rate	
Thermal drift, capsule 0.4 m deep, wet soil	0.0092 degrees per day, peak 0.0012 degrees per hour	R2 met on paper
Same at 0.3 m (TRL 2 depth), wet soil	0.0170 degrees per day, peak 0.0022 degrees per hour	Would miss R2
Crack gauge step; thermal swing of the gauge	0.024 mm; 0.39 mm per day (precaution rate taken over 24 h)	R3 met by design
Airtime per uplink	0.45 s (SF10), 1.81 s (SF12); 0.30 % of time at SF12	R4 met on paper
Confirmed warning to siren	about 13 s	R5 met by design
Warning to SMS	1.6 min at the first try; 4.6 min at SF12 with one lost uplink	R6 at risk
Siren at 100 m	65.5 to 68.5 dB(A) in open ground; about 5 m of reach over running plant	R7 at risk
Sensor load; precaution load	2.67 mW; 29.8 mW with the beacon at 1 % duty	Within the FieldNode 100 mW allowance
30 min alarm	3.00 Wh, 0.45 A at 12 V, 2.00 A from the cell	R8 at risk on rail current
5 sunless days in precaution with one alarm	7.3 Wh of 13.1 Wh usable at -10 °C	R8 met on energy
Bus cable; voltage drop	59.2 m; 0.096 V on the 5 V rail	
Mast in a 35 m/s gust (switch box off the mast)	113 MPa (factor 2.1); footing factor 2.7	
Siren level at the keyed switch	about 95 dB(A) on its post 5 m away (43 min NIOSH allowance); about 105 dB(A) on the mast (4 min)	Safety
Stake installation	43 min estimated; 3.6 L of grout	R10 not verifiable at TRL 3
90 days of raw data	363 kB	R12 met on paper

Cost

Table 4. Parts cost for the reference site (see `bom/bom.csv`).

Group	Cost	Requirement
Stakes, capsules and heads (items 1 to 3, three sets)	\$123	
Crack gauge with reader, cable, alert unit with switch post, consumables (items 4, 5, 7, 10)	\$122	
SlopeWatch-specific parts, reference site (existing pole)	\$245	R11 met on paper, \$5 within \$250
Optional mast and footing (item 8), where no pole exists	+\$24, giving \$269	Site option (SLW-DDR-002)
FieldNode core (item 6, costed in FieldNode)	\$126	Outside R11
Reference site total with FieldNode	\$371	
LoRaWAN gateway, if the site has no coverage	not in site cost (TwinKit gateway about \$290)	

■ Key design choices

Amish accepted every recommended choice on 2026-09-25 ("i accept all your recommendations, go with them across all repos"), recorded in SLW-DDR-002. Each choice below is decided by Amish, 2026-09-25: go with recommendation.

- **Budget (D1).** The FieldNode core is costed in its own project, as SunSpoke does with the SwapCell pack; the \$250 budget covers SlopeWatch-specific parts.
- **Reference site on an existing pole (DDR-002 item 4).** The node and alert unit go on an existing pole or building; the mast and footing (item 8) are a site option. This closes the \$11 gap that a new mast left.
- **Tailings dams in the pitch (D2).** Kept, with the scope limits in SLW-PRB-001 stated in every document: supplementary layer only, installed with the owner's and engineer of record's permission, no claim to detect brittle failure.
- **Surface tilt stakes plus a crack gauge (D3),** rather than borehole in-place inclinometers (deep movement, but a drill rig and far higher cost), GNSS receivers (costly and slower to resolve millimeters) or crack gauges alone.
- **Wired bus to one FieldNode (D4).** About \$41 per extra stake plus cable, against a FieldNode on every stake. A wireless stake variant is recorded for later.
- **Inclinometer (D5).** SCL3300 in mode 1, with an ADXL355-class accelerometer as the fallback.
- **Alert rules (D6).** The published 0.01 and 0.1 degrees per hour tilt-rate thresholds as defaults; warning on one stake confirmed on two consecutive readings (20 min); keyed 30 min silence that re-arms. Site values are set by an engineer after a baseline period. The precaution beacon flashes at 1 % duty or less (DDR-002 item 7).
- **Alert unit location (D7).** On the pole or mast at the toe; a second unit near the work face or in the village, linked by LoRa, as an option after co-design.
- **Keyed switch on its own post (DDR-002 item 6).** The switch box stands on a 26.9 mm post about 5 m from the siren, on a 7 m lead in conduit, where the siren gives about 95 dB(A) instead of about 105 dB(A) under it (SLW-CAL-001, section E).
- **Own gateway at SF12 sites (DDR-002 item 8).** A site whose uplinks need SF12 uses a TwinKit gateway, because hourly uplinks at SF12 exceed The Things Network's 30 s daily fair use.

- **Changes from the calculations.** The capsule sits 0.4 m deep with foam plugs; the crack gauge has its own reader; the crack precaution rate is taken over 24 h.

■ Safety

Safety: SlopeWatch is installed on ground that may already be moving and is meant to protect people from a slope failure. The two main hazards are harm to the installers and false confidence in the system. It is a research prototype and does not replace engineered monitoring, a trigger action response plan or evacuation planning.

- **Working on unstable slopes.** Install and service only with a partner's trained team, after a visual check by a competent person; never work below an actively moving face, below overhanging material or on a tailings dam crest or face without the owner's permit and the engineer of record's approval. Use a spotter, keep an escape route clear, and stop work in or after heavy rain.
- **False confidence and missed warnings.** A system that is silent is not proof of a safe slope. Brittle failures, failures deeper than the stakes, failures between stakes, earthquakes and heavy rain can all bring a slope down with little surface warning. Every site sign, SMS and document must say what SlopeWatch cannot detect. Flat batteries, cut cables and silenced sirens must raise a fault message.
- **False alarms.** Repeated false alarms teach people to ignore the siren. Thresholds and confirmation rules must be set with the community and reviewed after each alarm.
- **Lithium cell.** The FieldNode core holds a 19 Wh LiFePO4 cell, which supplies about 2 A during an alarm. Use the FieldNode's fuse and cold-charge lockout, do not charge a damaged cell, and keep the box out of standing water.
- **Cement grout.** Wet cement is alkaline and can burn skin and eyes. Wear gloves and eye protection and wash off splashes at once.
- **Mast and height.** Where the optional mast is used, erecting a 3.2 m mast needs two people; keep well clear of overhead power lines. An exposed mast on a ridge can attract lightning; bond the mast to an earth rod and fit surge protection where the long bus cable enters the node.
- **Noise.** A 110 dB(A) siren can damage hearing at close range: about 105 dB(A) directly below it, where the NIOSH limit allows about 4 min. The keyed switch therefore stands on its own post about 5 m away, at about 95 dB(A) (about 43 min allowed; SLW-CAL-001, section E). Mount the siren at least 3 m above ground, silence it only with the keyed switch, and keep people away from the mast during an alarm.

■ Open questions

- FieldNode to confirm that its 12 V rail supplies at least 0.5 A continuously for 30 min (R8); decided by Amish as a request to FieldNode (SLW-DDR-002), not yet actioned there.
- Decide whether sites with machinery get a second alert unit near the work face or a radio pager (R7).
- Decide how to protect a surface cable from rockfall and movement, and how to detect a cut cable.
- Set crack-gauge thresholds with a geotechnical partner (SLW-DDR-001 O3).
- Confirm LoRaWAN coverage at candidate sites; a site that needs SF12 gets a TwinKit gateway (SLW-DDR-002).
- Choose the first partner and site type for co-design (SLW-DDR-001 O2).
- Measure temperature drift of a buried capsule in a chamber (CalRig) and at a site; this is TRL 4 work and on hold.

Concept media: [blueprint sheet](#), [interactive 3D model](#).